




Technical Data Sheet

Pb 7351QS – Flying splice Tape Red

Construction:

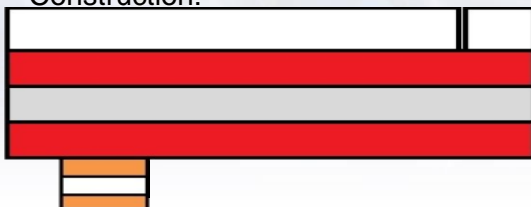

Silicone coated Glassine paper Splited liner
High temperature Acrylic adhesive
Tissue flat paper carrier
High temperature Acrylic adhesive
Separatable paper layer

Description

Single sided adhesive tape with special construction for Quick Splice application. Suitable for magazine printers for coated paper and also raw paper. Tape is developed for flexographic orrotogravure printers. Red colored backing for splice sensor detection. Pb 7351QS is developed for great and practical handling during splice edge preparation. Tape shows also very easy tearing by hands.

Carrier

Flat paper tissue

Liner

White silicone paper splited liner

Adhesive

High temperature acrylic

Area of use

It is specially developed product for Flying or Quick splice of coated and uncoated paper material industry – quick splice applications when unstopping machine splice requirement occur. Self-splittable paper layer tape for flying splices in paper printing industry.

Technical Data

Thickness	0,120mm
Adhesion Strenght (Afera 5001)	25 N/25mm +/- 0,5
Shear Strength (Afera 5001)	40,2 N/25mm +/- 2 Splicing side
Temperature resistance	240 °C SHORT TERM
Shelf life	12 months, in closed original packing. At temperature of 21°C and a relative humidity of 50%. The quality and durability of the tape may vary according to temperature and humidity. Low temperatures can increase the risk of condensation, consequently reducing the tack of the self-adhesive product

PROFIBOND Slovakia, s.r.o.

Office: Mlynská 694/2, Stropkov, 091 01

GSM: + 421 948 784 464

mail: profibond@profibond.sk

web: www.profibond.sk